



SCOTCH-YOKE / SPRING RETURN / AS125

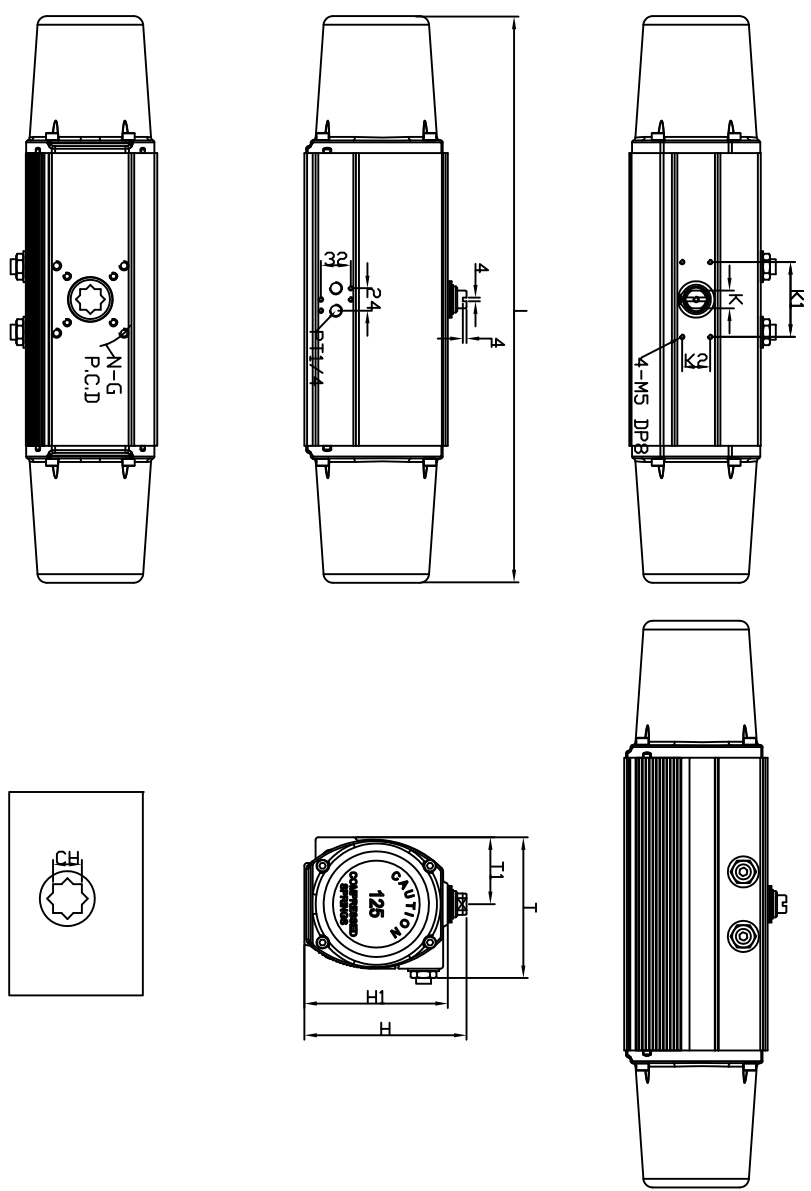

■ DIMENSION(mm)

MODEL	K1	K2	ISO	ØP.C.D	N-G(DP)	K	L	T	T1	H	H1	CH	DP	WEIGHT
AS125	80	30	F07/F10	70/102	4-M8/M10(16/19)	19	606	151	72	174	154	22*22	26	17.6kg

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	스토퍼간격 및 캠각이포크 수정	노용아/130619		
△	커버 오링부 수정,포크 색칠	노용아/170828		

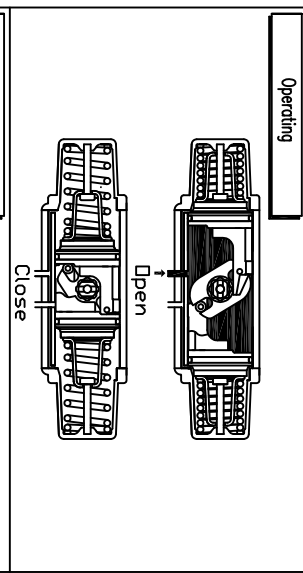

MAJOR PART LIST

NO.	PART NAME	MATERIAL
1	BODY	ALUMINIUM
2	SHAFT	STEEL ALLOY (NICKEL COATING)
3	SHAFT ROLLER	ENGINEERING PLASTIC
4	CRANK	STEEL ALLOY
5	PISTON	ALUMINIUM
6	COVER	ALUMINIUM

SPECIFICATIONS

1. Operating fluid : Compressed dry air
2. Operating pressure : 4Bar~7Bar
3. Operating temperature : -20~80°
4. Spring torque : Weak/Middle/Strong

PRODUCT NAME Pneumatic actuator		TITLE DRAWING	
MODEL AS125	HARDNESS -	DRAWING NO. PAAS125-001	REV. 7
KOSAPLUS Co.,Ltd			