


RACK&PINION / DOUBLE ACTING / RD32

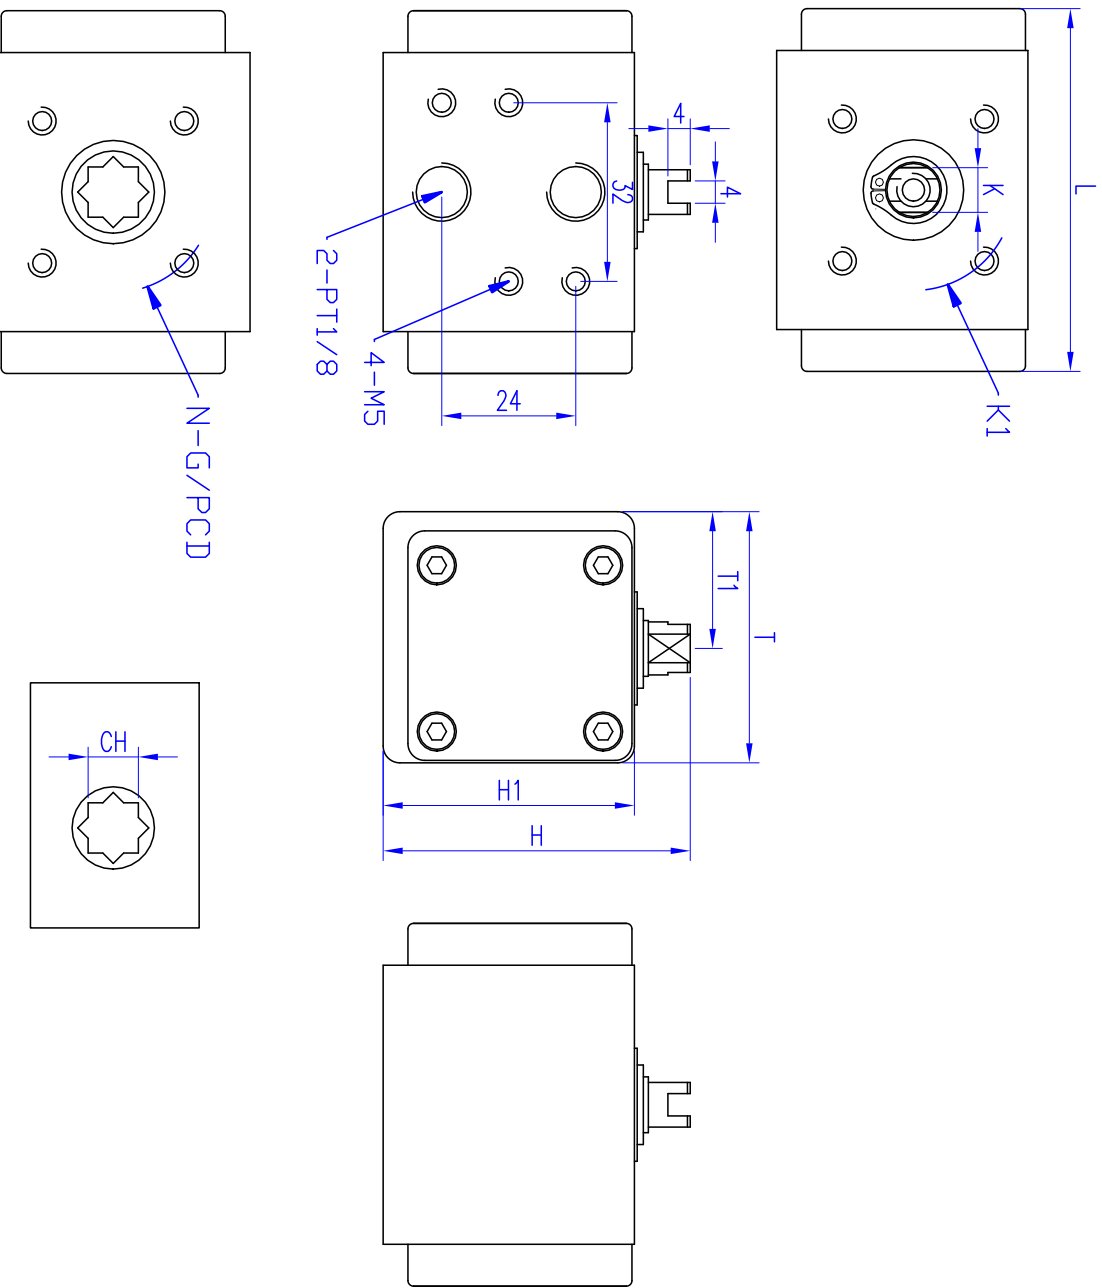

■ DIMENSION(mm)


MODEL	K1	ISO	φP.C.D	N-G(OP)	K	L	T	T1	H	H1	CH	DP	WEIGHT
RD32	4-PCD35 M5 DP6	F03	36	4-M5 (7)	8	65	45	24.5	55	45	9*9	9	0.3kg

■ Torque (Nm) at 4.5Bar


	Open	5.3
	Close	5.3

REV. NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	최초작성	노을이/110226		
△	바탕 ISO 및 권이식수 삽입	노을이/120730		

Operating




Open(Bottom hole)



Close(Top hole)

MAJOR PART LIST



NO.	PART NAME	MATERIAL
1	BODY	ALUMINUM
2	SHAFT	STEEL ALLOY (NICKEL COATING)
3	PISTON	ENGINEERING PLASTIC
4	COVER	ENGINEERING PLASTIC

SPECIFICATIONS

1. Operating fluid : Compressed dry air
2. Operating pressure : 4Bar~7Bar
3. Operating temperature : -20~80°

PRODUCT NAME Pneumatic actuator		TITLE DRAWING	
MODEL RD32	HARDNESS -	DRAWING NO. PARD32-001	
MATERIAL -	APPROVED DATE	REV. 1	

SAMILAUTO Co.,Ltd