

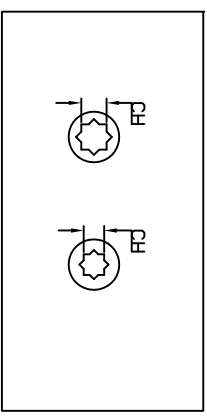
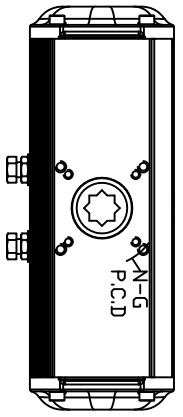

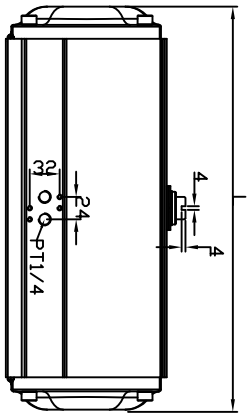
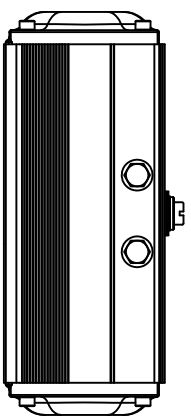


SCOTCH-YOKE / DOUBLE ACTING / AD140

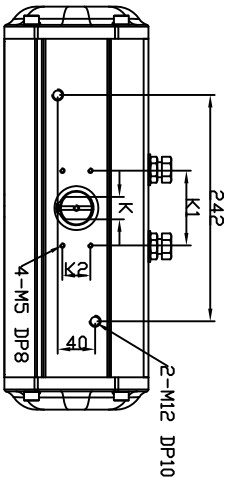

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△	상부볼트 포크삭제	노용아 / 1801.30		
△	아이볼트 수거	노용아 / 2002.18		

Operating

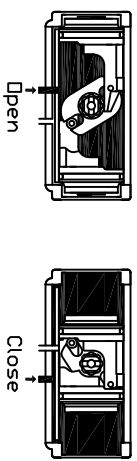

MAJOR PART LIST

NO.	PART NAME	MATERIAL
1	BODY	ALUMINUM
2	SHAFT	STEEL ALLOY (NICKEL COATING)
3	SHAFT ROLLER	ENGINEERING PLASTIC
4	CRANK	STEEL ALLOY
5	PISTON	ALUMINUM
6	COVER	ALUMINUM

SPECIFICATIONS

1. Operating fluid : Compressed dry air
2. Operating pressure : 4Bar~7Bar
3. Operating temperature : -20~80°

■ DIMENSION(mm)

MODEL	K1	K2	ISO	φP.C.D	N-G(OP)	K	L	T	T1	H	H1	CH	DP	WEIGHT
AD140	80	30	F10/F12	102/125	4-M10/M12 (18/26)	24	431	164	77	192	172	27*27 22*22	30 30	16.4kg

PRODUCT NAME Pneumatic actuator		KOSAPLUS Co.,Ltd	
MODEL AD140	TITLE DRAWING	DRAWING NO. PAAD140-001	REV. 6
MATERIAL -	HARDNESS -	APPROVED DATE	
DRAWING DATE			